



ApeosPort Print 4730SD

A4 Monochrome Printer

Features













- Fast printing of 47 ppm, with FPOT as fast as 6 seconds
- Supports paper feeding of up to 650 sheets as standard, including 100-Sheet
 Multipurpose Feeder. Up to 3 optional 550-Sheet Tray can be added to support maximum capacity of 2,300 sheets
 - Flexible media processing supports cardstock, small media, and envelopes
 - Supports Gigabit Ethernet, USB, and optional Wi-Fi for flexible networking
 - Flexible networking. Gigabit Ethernet capability enables faster communication between the printer and the network, and the optional Wi-Fi kit allows easy wireless connectivity

Security

- Prevents information leakage with Confidential Print function
- Controls access to the Printer functions
- Supports settings to delete temporary data files in memory & hard disk as an option





Easy Operation

- Equipped with 4.3-inch colour touch screen.
 Easy-to-understand and easy-to-use operations such as USB flash drive Print,
 Secure Print, and Job Verification
- Compatible with Mopria[®] and AirPrint, you can easily print from mobile devices
- Easy printing without PC. In addition to USB flash drive Print, Bookmark feature also allows you to print documents* on the server or the website
 - * : PDF/TIFF/JPFG

Ecology

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

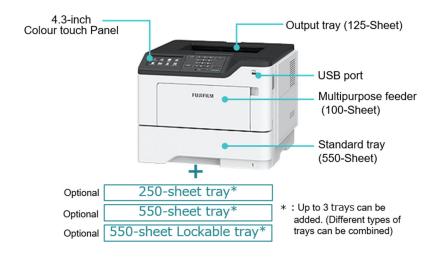



Specifications

•			
Printing			
Display	4.3-inch (10.9 cm) Colour touch screen		
Print Speed: Up to	Black: 47 ppm (A4)		
Time to First Page: As fast as	Black: 6 seconds		
Print Resolution	Black: 1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 600 x 600 dpi		
Memory	1024 MB		
Hard Disk	Option available		
Supplies			
Toner Cartridge Yields (up to)	25,000-page Ultra High Yield Cartridge		
Imaging Unit Estimated Yield: Up to	60000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage		
Cartridge(s) Shipping with Product	6,000-page Toner Cartridge		
Paper Handling			
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 250-Sheet Output Bin		
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 550-Sheet Lockable Tray		
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm / Maximum: 2300 pages 75 gsm		
Paper Output Capacity: Up to	250 pages 75 gsm		
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies		
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, Statement, Executive, Universal, DL Envelope, Folio, 10 Envelope		
General Information			
Standard Ports	One Internal Card Slot, Rear USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A)		
Wi-Fi	Option available (802.11 a/b/g/n/ac Wireless)		
Noise Level: Operating	Print: 56 dBA		
Specified Operating Environment*1	Humidity: 8 to 80% ^{*2} Relative Humidity, Temperature: 10 to 32°C ^{*3} (excluding faults caused by condensation)		
Size (mm - H x W x D) / Weight (kg)	303 x 399 x 374 mm / 16.1 kg		

^{*1 :} Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *2 : When the humidity is 80%, the temperature is 25.5°C or less. *3 : Humidity 45% or less when the temperature is 32°C

Options

Product Name	Product Code
250-Sheet Tray	EL300954
550-Sheet Tray	EC104315
550-Sheet Lockable Tray	EC104334
Wireless Print Server	EC104320
500 GB Hard Disk	EL300956

Consumables*1

Product Name	Product Code	Product Life
Black Ultra High Yield Use and Return Toner Cartridge*2	CT203475	Up to 25,000 pages
Black Ultra High Yield Regular Toner Cartridge	CT203521	Up to 25,000 pages
Black Use and Return Imaging Unit ^{*2}	CT351279	Up to 60,000 pages
Black Regular Imaging Unit	CT351308	Up to 60,000 pages

^{*1 :} Average standard page yield value declared in accordance with ISO/IEC 19752.

Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website.

For more information or detailed product specification, please call or visit us at

FUJIFILM Business Innovation Australia Pty Ltd

8 Khartoum Road MACQUARIE PARK NSW 2113 Australia

Tel. +61 2 9856 5000

fujifilm.com/fbau

•FUJIFILM and FUJIFILM logo are registered trademarks or trademarks or FUJIFILM Corporation. •ApeosPort is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

^{*2 :} The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.